


1 Part Mechanical Splice 2 Leg Bridle

Extra Improved Plow Steel IWRC

Rated Capacity In Tons

Rope Diameter	Vertical	30 Degree	45 Degree	60 Degree
1/4"	1.3	0.65	0.91	1.1
5/16"	2	1	1.4	1.7
3/8"	2.9	1.4	2	2.5
7/16"	3.9	1.9	2.7	3.4
1/2"	5.1	2.5	3.6	4.4
9/16"	6.4	3.2	4.5	5.5
5/8"	7.8	3.9	5.5	6.8
3/4"	11	5.6	7.9	9.7
7/8"	15	7.6	11	13
1"	20	9.8	14	17
1-1/8"	24	12	17	21
1-1/4"	30	15	21	26
1-3/8"	36	18	25	31
1-1/2"	42	21	30	37
1-5/8"	49	24	35	42
1-3/4"	57	28	40	49
1-7/8"	64	32	46	56
2"	73	37	52	63
2-1/8"	80	40	56	69
2-1/4"	89	44	63	77
2-3/8"	99	49	70	85
2-1/2"	109	54	77	94
2-5/8"	119	60	84	103
2-3/4"	130	65	92	113
2-7/8"	141	71	100	122
3"	153	77	108	132
3-1/8"	165	82	117	143
3-1/4"	177	89	125	153
3-3/8"	190	95	135	165
3-1/2"	203	102	144	176

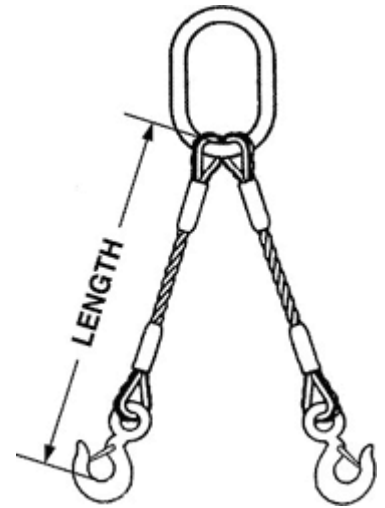

Rated Capacities Basket Hitch Based On D/d Ratio of 25

Rated capacities Based On Pin Diameter No Larger Than Natural Eye Width Or Less Than The Nominal Sling Diameter.

Rated Capacities Based On Design Factor Of 5

Horizontal Sling Angles Less Than 30 Degrees Shall Not Be Used

Rated Capacities Shown Apply Only to 6x19 and 6x37 Classification EIPS IWRC Wire Rope