


1 Part Mechanical Splice 3 Leg Bridle

Extra Improved Plow Steel IWRC

Rated Capacity In Tons

Rope Diameter	Vertical	30 Degree	45 Degree	60 Degree
1/4"	1.9	0.97	1.4	1.7
5/16"	3	1.5	2.1	2.6
3/8"	4.3	2.2	3	3.7
7/16"	5.8	2.9	4.1	5
1/2"	7.6	3.8	5.4	6.6
9/16"	9.6	4.8	6.8	8.3
5/8"	12	5.9	8.3	10
3/4"	17	8.4	12	15
7/8"	23	11	16	20
1"	29	15	21	26
1-1/8"	36	18	26	31
1-1/4"	44	22	31	38
1-3/8"	53	27	38	46
1-1/2"	63	32	45	55
1-5/8"	73	37	52	63
1-3/4"	85	42	60	74
1-7/8"	97	48	68	84
2"	110	55	78	95
2-1/8"	119	60	84	103
2-1/4"	133	67	94	116
2-3/8"	148	74	105	128
2-1/2"	163	82	115	141
2-5/8"	179	89	126	155
2-3/4"	195	97	138	169
2-7/8"	212	106	150	183
3"	230	115	162	199
3-1/8"	247	124	175	214
3-1/4"	266	133	188	230
3-3/8"	286	143	202	247
3-1/2"	305	152	215	264

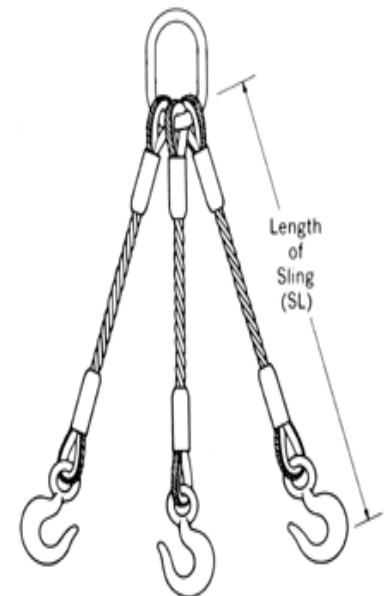

Rated Capacities Basket Hitch Based on D/b Ratio of 25

Rated Capacities Based On Pin Diameter No Larger Than Natural Eye Width Or Less Than The Nominal Sling Diameter

Rated Capacities Based On Design Factor of 5

Horizontal Sling Angles Less Than 30 Degrees Shall Not Be Used

Rated Capacities Shown Apply Only To 6x19 and 6x37 Classification Wire Rope