


1 Part Mechanical Splice 4 Leg Bridle

Extra Improved Plow Steel IWRC

Rated Capacity In Tons

Rope Diameter	Vertical	30 Degree	45 Degree	60 Degree
1/4"	2.6	1.3	1.8	2.2
5/16"	4	2	2.8	3.5
3/8"	5.7	2.9	4.1	5
7/16"	7.8	3.9	5.5	6.7
1/2"	10	5.1	7.1	8.8
9/16"	13	6.4	9	11
5/8"	16	7.8	11	14
3/4"	22	11	16	19
7/8"	30	15	21	26
1"	39	20	28	34
1-1/8"	48	24	34	42
1-1/4"	59	30	42	51
1-3/8"	71	36	50	62
1-1/2"	84	42	60	73
1-5/8"	98	49	69	85
1-3/4"	113	57	80	98
1-7/8"	129	64	91	112
2"	147	73	104	127
2-1/8"	159	80	112	138
2-1/4"	178	89	126	154
2-3/8"	197	99	139	171
2-1/2"	217	109	154	188
2-5/8"	238	119	168	206
2-3/4"	260	130	184	225
2-7/8"	282	141	200	244
3"	306	153	216	265
3-1/8"	330	165	233	286
3-1/4"	354	177	250	307
3-3/8"	381	190	269	330
3-1/2"	406	203	287	352

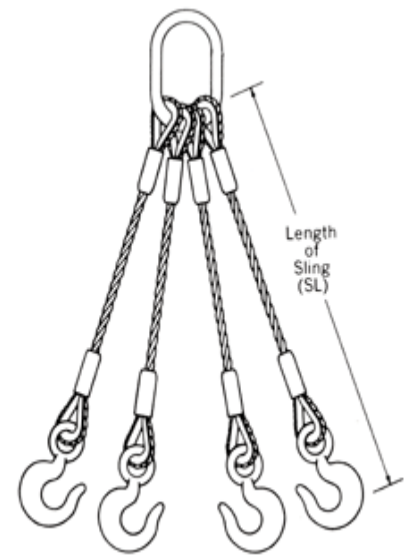

Rated Capacities Basket Hitch Based on D/b Ratio of 25

Rated Capacities Based On Pin Diameter No Larger Than Natural Eye Width Or Less Than The Nominal Sling Diameter

Rated Capacities Based On Design Factor of 5

Horizontal Sling Angles Less Than 30 Degrees Shall Not Be Used

Rated Capacities Shown Apply Only To 6x19 and 6x37 Classification Wire Rope