




1 Part Mechanical Splice

Extra Improved Plow Steel IWRC

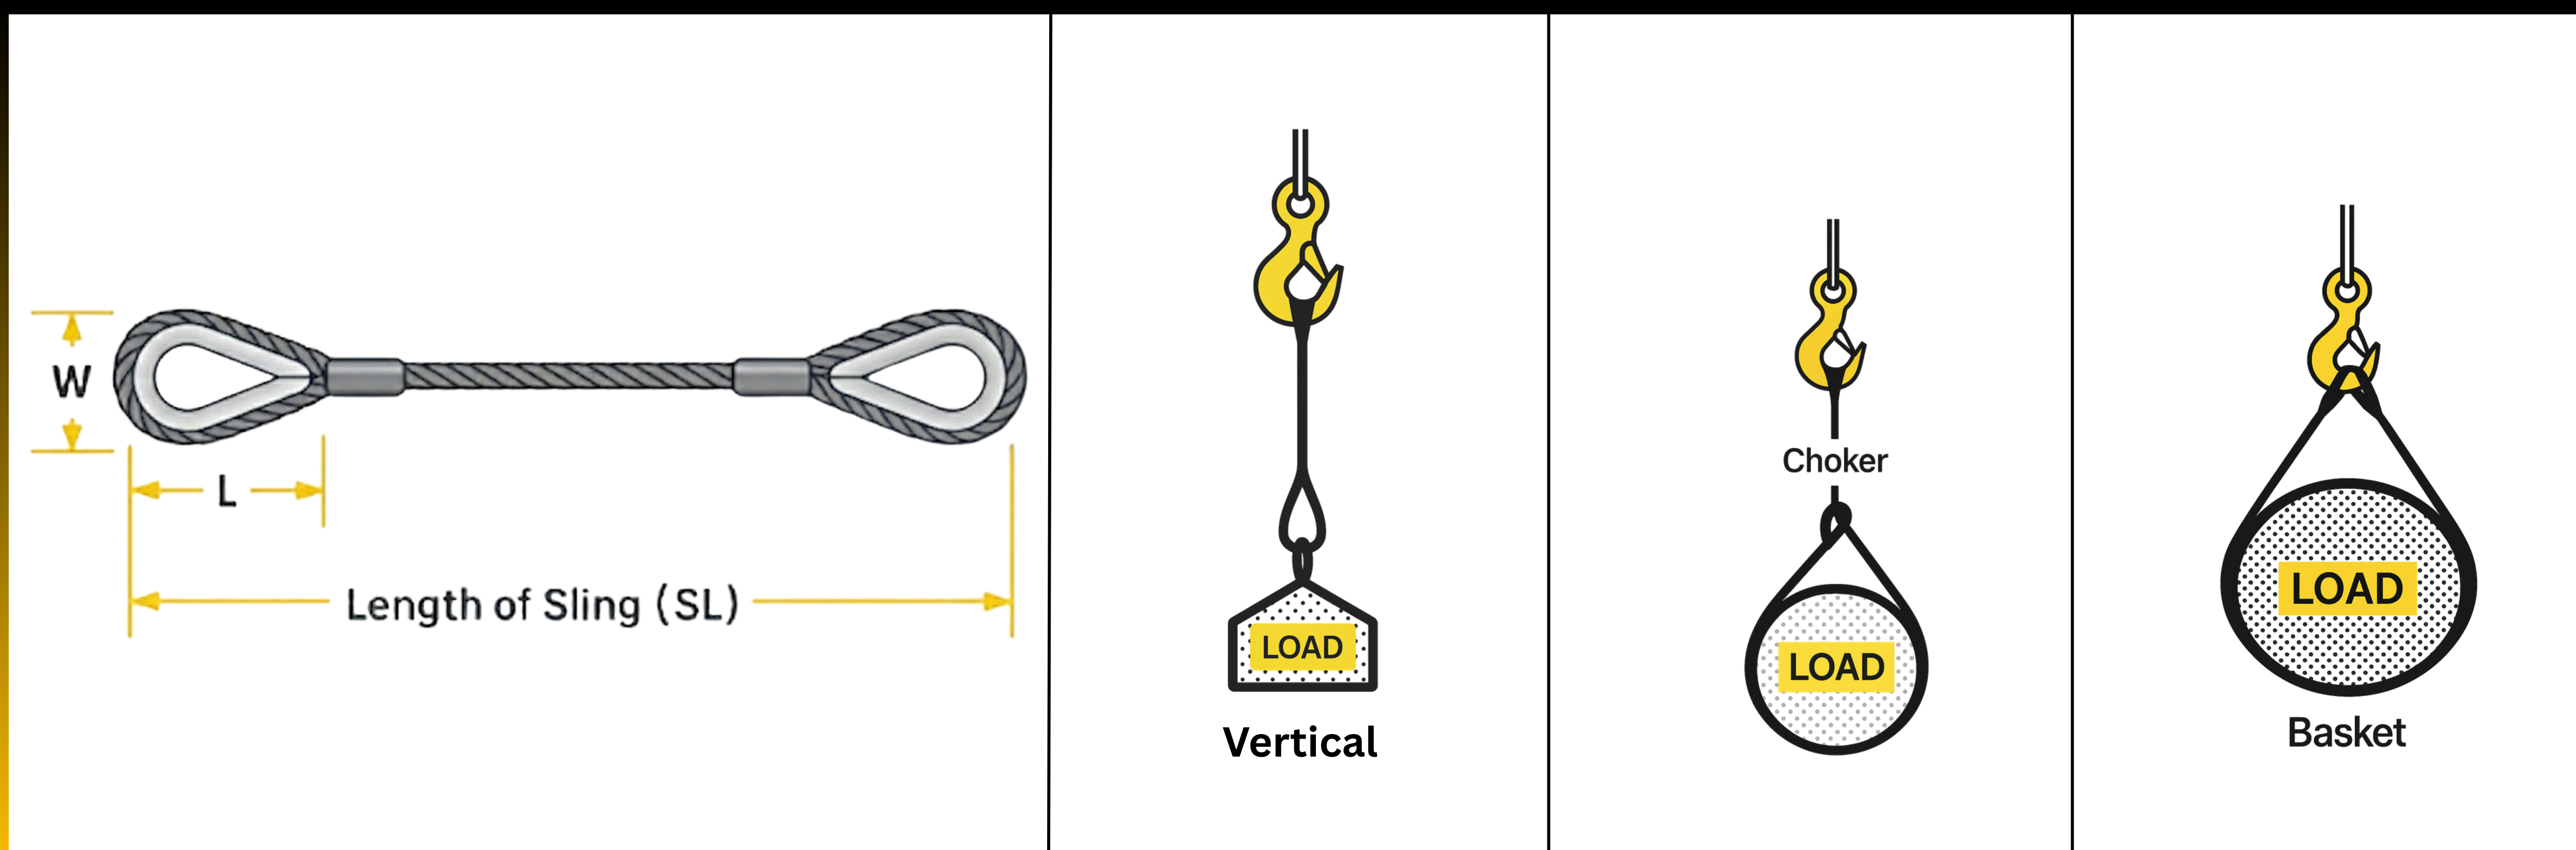

***Rated Capacity In Tons**

Rope Diameter	Vertical	Choker	Basket
1/4"	0.65	0.48	1.3
5/16"	1	0.74	2
3/8"	1.4	1.1	2.9
7/16"	1.9	1.4	3.9
1/2"	2.5	1.9	5.1
9/16"	3.2	2.4	6.4
5/8"	3.9	2.9	7.8
3/4"	5.6	4.1	11
7/8"	7.6	5.6	15
1"	9.8	7.2	20
1-1/8"	12	9.1	24
1-1/4"	15	11	30
1-3/8"	18	13	36
1-1/2"	21	16	42
1-5/8"	24	18	49
1-3/4"	28	21	57
1-7/8"	32	24	64
2"	37	28	73
2-1/8"	40	31	80
2-1/4"	44	35	89
2-3/8"	49	38	99
2-1/2"	54	42	109
2-5/8"	60	46	119
2-3/4"	65	51	130
2-7/8"	71	55	141
3"	77	60	153
3-1/8"	82	64	165
3-1/4"	89	69	177
3-3/8"	95	74	190
3-1/2"	102	79	203

Additional Information

- **Rated Capacities** Basket Hitch Based On D/b Ratio Of 25
- **Rated Capacities** Based On Pin Diameter No Larger Than Natural Eye Width Or Less Than The Nominal Sling Diameter
- **Rated Capacities** Based On Design Factor Of 5
- **Rated Capacities** Shown Apply Only To 6x19 and 6x37 Classification EIPS IWRC Wire Rope